



SPEC SHEET

LIS61S Combat Single Leg 6' Snaphook Lanyard with Internal Shock Absorber

Design Specifications

1.57" Polyester tubular webbing incorporated with energy absorber

Both sides textile loops with Steel Stamped Snap Hook

Metal Components

Material Alloy steel, Zinc Plated

Min. Breaking Strength 5000 lbs.

Finish Shot Blasted

Webbing Specifications

Material Polyester

Width 1.57"

Min. Breaking Strength 6000 lbs.

Stitching Thread High-Tenacity Polyester

Weight 2.5 lbs

Max. Capacity 310 lbs


Relevant Standards

ANSI Z359.13-2013

A10.32-2004

OSHA CFR 1926.502

CFR 1910.140

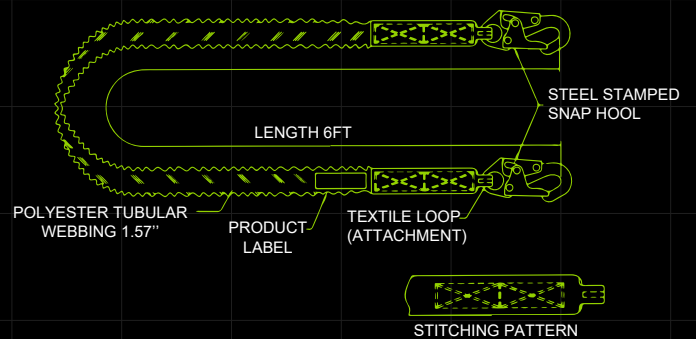

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

