



SPEC SHEET

PSSW2R Rebar Positioning Chain Assembly with Swivel

Design Specifications

Double "Y" shaped lanyard

Incorporates a high tensile strength chain

Swivel Rebar Hook at union end

Forged Clevis Snap Hooks used for positioning

Material Specifications

Alloy steel

Plating

Zinc Plated

Finish

Deburred & Polished

Grade of Chain

Grade 80

Chain Diameter

0.31 inch link of chain

Tensile Strength

Min. 5000 lbs.

Relevant Standards


OSHA

CFR 1926.502

CFR 1910.140

ANSI

Z359.3-2017

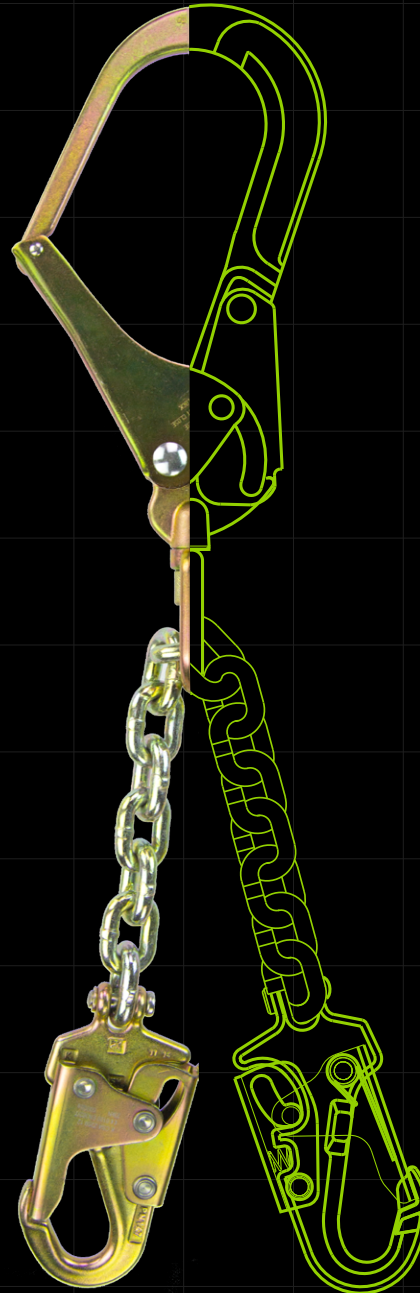

WARNINGS:

• Do not skip user instructions supplied with this product.
• Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



info@frontlinefall.com

www.frontlinefall.com
© 2019

2023 NW 84th Ave, Miami FL, 33122