

RPW062R

Web 6ft SRL with Steel Rebar Hook Ends

Design Specifications

Robust & durable plastic casing

Quarter turn locking steel Carabiner with Twin SRL connector

Swivel steel rebar hook at attachment ends

Technora Webbing with Shock Absorber

Length (Ea) 6'

Webbing Thickness 13/16"

Total Weight (Ea) 3.72 ± 0.02 lbs.

ANSI Performance Specifications

Connector Strength 5,000 lbs.

Max. Capacity 310 lbs.

Max. Arrest Distance 24" CLASS A

Avg. Arrest Force (Ea) <1800 lbs.

Web Min. Breaking Strength 4500 lbs.

Relevant Standards

OSHA

CFR 1926.502

CFR 1910.140

ANSI

Z359.14-2014

A10.32-2012



Almost Pocket Size



Lightest Available in It's Class

WARNINGS:

• Do not skip user instructions supplied with this product.
• Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

FRONTLINE
FALL PROTECTION



info@frontlinefall.com

www.frontlinefall.com
© 2019

2023 NW 84th Ave, Miami FL, 33122



FRONT VIEW

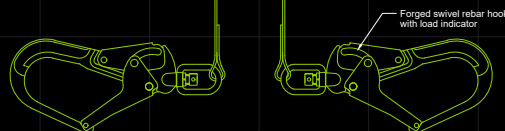

SIDE VIEW



2.55"